


2. HEAVY HEX NUT (ASME B18.2.2 TABLE 10 / 2015)

HEAVY HEX NUT (ASME B18.2.2 TABLE 9 / 1987)

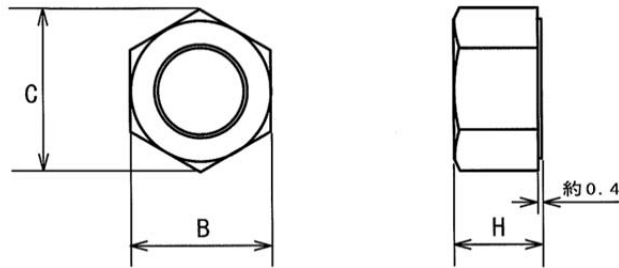

単位:mm

DIA	B		C		H	
	Max	Min	Max	Min	Max	Min
1/2	22.2	21.6	25.7	24.6	12.8	11.8
5/8	27.0	26.2	31.2	29.8	16.0	14.9
3/4	31.8	30.8	36.7	35.1	19.3	18.0
7/8	36.5	35.4	42.2	40.4	22.5	21.2
1	41.3	40.0	47.7	45.6	25.7	24.3
1-1/8	46.0	44.6	53.2	50.9	28.9	27.4
1-1/4	50.8	49.2	58.6	56.1	31.8	30.1
1-3/8	55.6	53.8	64.2	61.4	35.0	33.3
1-1/2	60.3	58.4	69.6	66.6	38.2	36.4
1-5/8	65.1	63.0	75.2	71.8	41.5	39.5
1-3/4	69.9	67.6	80.6	77.1	44.7	42.6
1-7/8	74.6	72.2	86.2	82.3	47.9	45.8
2	79.4	76.8	91.6	87.6	51.1	48.9
2-1/4	88.9	86.1	102.6	98.1	57.2	54.7
2-1/2	98.4	95.3	113.6	108.6	63.6	61.0
2-3/4	108.0	104.4	124.6	119.1	70.1	67.2
3	117.5	113.7	135.6	129.6	76.5	73.5
3-1/4	127.0	122.9	146.7	140.1	82.6	79.3
3-1/2	136.5	132.1	157.7	150.6	89.1	85.6
3-3/4	146.1	141.3	168.7	161.1	95.5	91.8
4	155.6	150.5	179.7	171.6	102.0	98.1
4-1/4	165.1	159.7	190.7	182.1	108.4	104.3
4-1/2	174.6	168.9	201.7	192.6	114.9	110.6
4-4/3	184.2	178.1	212.6	203.0	121.3	116.8
5	193.7	187.3	223.6	213.6	127.8	123.1
5-1/4	203.2	196.5	234.6	224.1	134.2	129.3
5-1/2	212.7	205.7	245.6	234.5	140.7	135.6
5-3/4	222.3	214.9	256.6	245.0	147.1	141.8
6	231.8	224.2	267.6	255.5	153.6	148.1